


SCTF[®]



可编程 时钟振荡器

值得信赖的专业频率控制元件制造商



www.sctf-crystal.com

值得信赖的专业频率控制元件制造商



企业简介

Company introduction

Since 2003

专业研发、生产、销售系列石英晶体及振荡器产品

推行国际标准质量管理体系：ISO9001:2015、ISO14001: 2015、IATF16949: 2016

国家高新技术企业、专精特新企业、创新型中小型企业

符合ROHS、REACH标准

以客户为中心 视质量为生命

提供晶振及周边电路运用解决方案



SCTF® 深圳市星通时频电子有限公司
SHENZHEN SCTF ELECTRONICS CO.,LTD


www.sctf-crystal.com

0755-86097105

sales@sctf-crystal.com

产品外观

Product Appearance

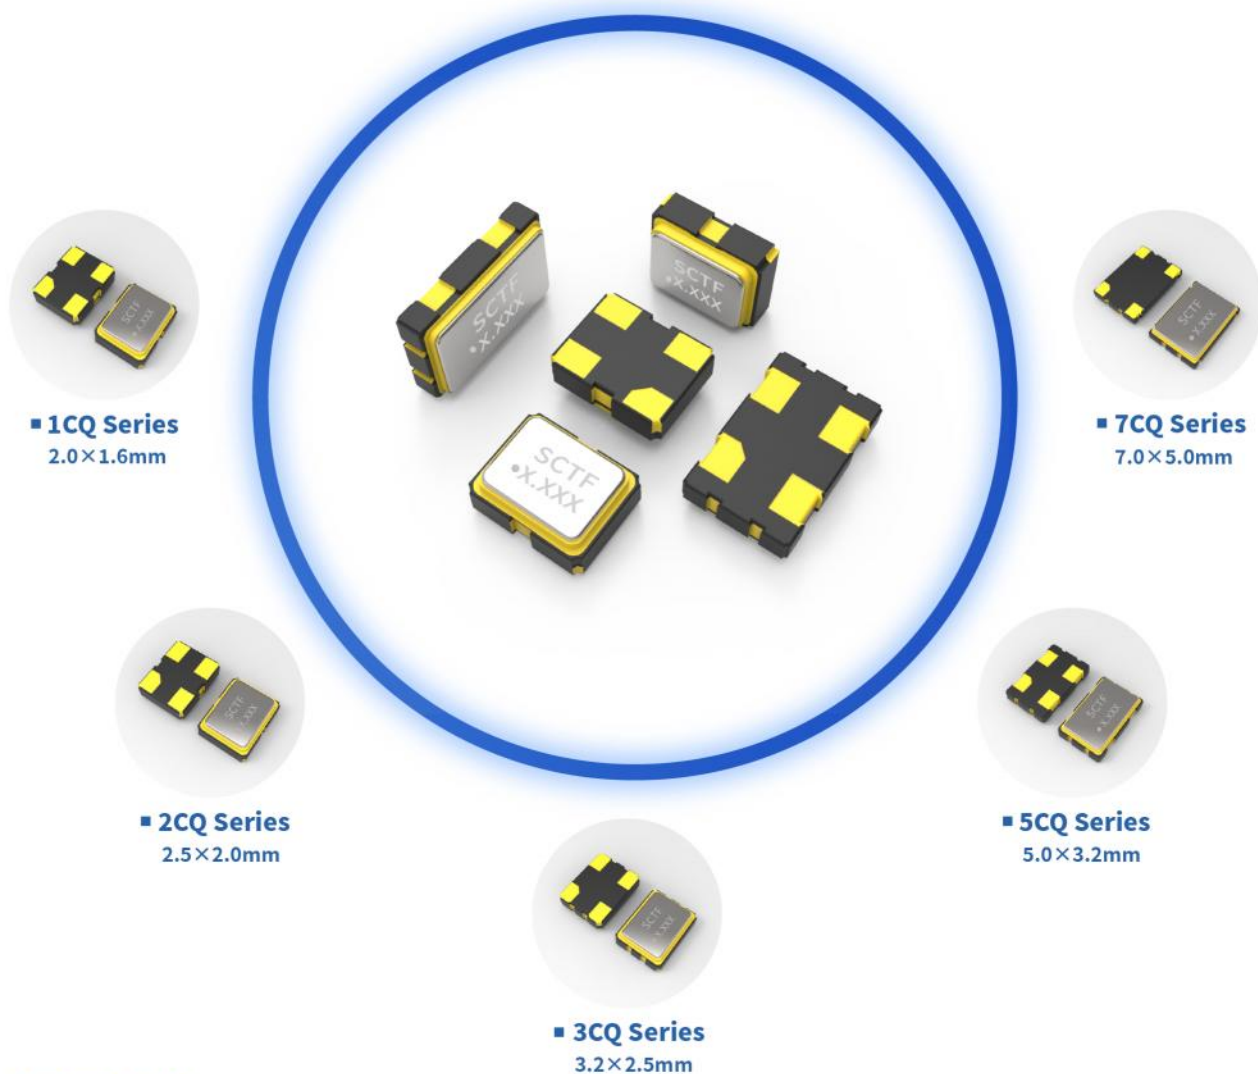

产品结构

Product Structure



产品选型指南

Product Selection Guide

Item Series	Size [mm]		Frequency Range [MHz]	Supply Voltage [Typ.V]	Frequency Tolerance	Frequency Drift	Current	Operating Temperature
	L	W						
1CQ	2.0	1.6	1 ~ 200	1.8 2.5 3.3	10 20	15 20 30	40mA max.	-20°C~+70°C -40°C~+85°C
2CQ	2.5	2.0						
3CQ	3.2	2.5						
5CQ	5.0	3.2						
7CQ	7.0	5.0						


若需要更详细的资料请查询详细规格书或和我们的技术人员联系。

- 1. 选择需要的封装规格及产品系列：2.5×2.0mm; 2CQ Series
- 2. 选择需要的频率：200MHz
- 3. 选择需要的工作电压：3.3V
- 4. 选择需要的频率稳定度 (@+25°C)：±10ppm
- 5. 选择需要的工作温度范围：-40°C ~ +85°C
- 6. 选择需要的频率&温度特性：±30ppm

您需要的产品是：2CQ Series 200MHz 3.3V ±10ppm@25°C ±30ppm@ -40°C~+85°C

频率温度特性曲线

Frequency Temperature Characteristics

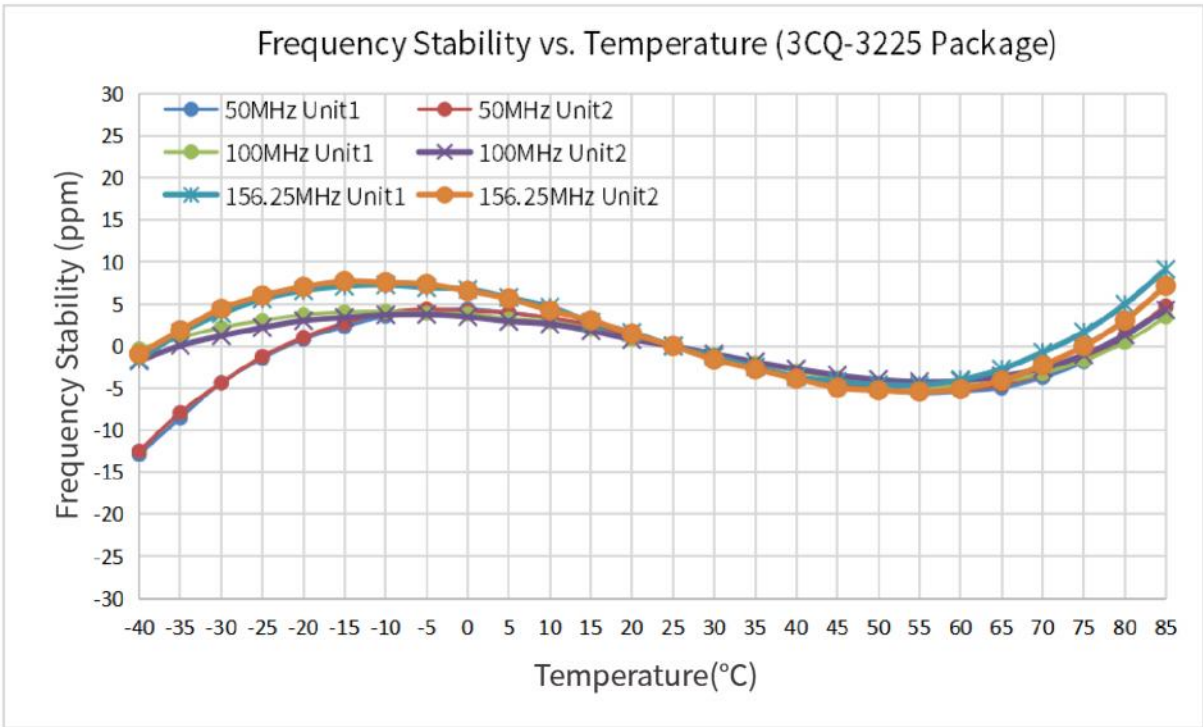

零部件编码示意

Options and Part Identification

Options and Part Identification : Example SXQP3M1.000B20F30TNN

Company	Technology	Ceramic Package	Frequency Code [MHz]	Supply Voltage	Frequency Tolerance	Operating Temperature	Frequency Drift	Output	Current Consumption	Phase Noise	
SX	QP	3M	X.XXX	B	20	F	30	T	N	N	
Code	Company		Frequency		Code	Frequency Tolerance	Code	Frequency Drift	Code	Current	
SX	SCTF		1.000		10	±10ppm	15	±15ppm	N	Standard	
			13.560		20	±20ppm	20	±20ppm			
			19.200				30	±30ppm			
			37.125								
	Code	Technology		Code	Voltage	Code	Operating Temperature	Code	Output	Code	Phase Noise
	QP	Q-MEMS		D	1.8V	E	-20°C ~ +70°C	T	Squarewave	N	Standard
				H	2.5V	F	-40°C ~ +85°C				
				B	3.3V						
				A	5.0V						
		Code	Ceramic Package								
		7M	7.0×5.0×1.3mm								
		5M	5.0×3.2×1.2mm								
		3M	3.2×2.5×0.95mm								
		2M	2.5×2.0×0.81mm								
		1M	2.0×1.6×0.75mm								

If you have other parameter requirements, you can contact **SCTF** at any time.

1CQ Series 2.0 x 1.6 mm SMD Crystal Oscillator

Feature

- PLL technology to enable setting any output frequency
- CMOS compatible logic levels
- Tri-state function available
- Supply voltage range : 1.62V ~ 3.63V(Compatible with 1.8V, 2.5V, 3.3V)
- RoHS Compliant / Pb Free

Applications

- Wireless Devices
- Internet of Things (IoT) devices
- Ethernet/Gigabit Ethernet
- Audio, Video, Gaming products
- Micro base station



Electrical Specifications

Item	Symb.	Min.	Typ.	Max.	Unit	Notes
Frequency Range	Freq.	1.000		200.000	MHz	
Operating Temperature	T _{use}	-20		+70	°C	
		-40		+85	°C	
Storage Temperature Range	T _{stg}	-55		+125	°C	
Supply Voltage	V _{dd}	1.62	1.8/2.5/3.3	3.63	V	
Output Load	L _{CMOS}		15		pF	
Current Consumption	I _{cc}			40	mA	
Duty Cycle	SYM	45		55	%	50 % V _{dd} level, L _{CMOS} ≤ 15 pF
Rise / Fall Time	T _R / T _F			5	nS	10% V _{dd} to 90% Level
Start-up Time	T _{str}			10	mS	To 90% of Final Amplitude
High output voltage	V _{OH}	0.9V _{dd}			V	
Low output voltage	V _{OL}			0.1V _{dd}	V	
Enable Voltage High(Logic 1)	V _{IH}	0.7V _{dd}			V	Output will be disable if OE is Logic 0 Output will be enable if OE is Logic 1 or open
Enable Voltage Low(Logic 0)	V _{IL}			0.3V _{dd}	V	
RMS Phase Jitter	T _{RPJ}			1	pSec	Integrated 12KHz to 20MHz
Aging	f _{age}			3	ppm	1st. Year at 25°C


Frequency Stability & Operating Temperature Range

Temp.	FT	±20ppm	±25ppm	±30ppm	±50ppm
-20°C to +70°C	△	★	★	★	★
-40°C to +85°C		△	★	★	★


★: Available △: Conditional

All condition: Include 25°C tolerance, operating temperature range, input voltage change, aging, load change.

Dimensions (UNIT:mm)

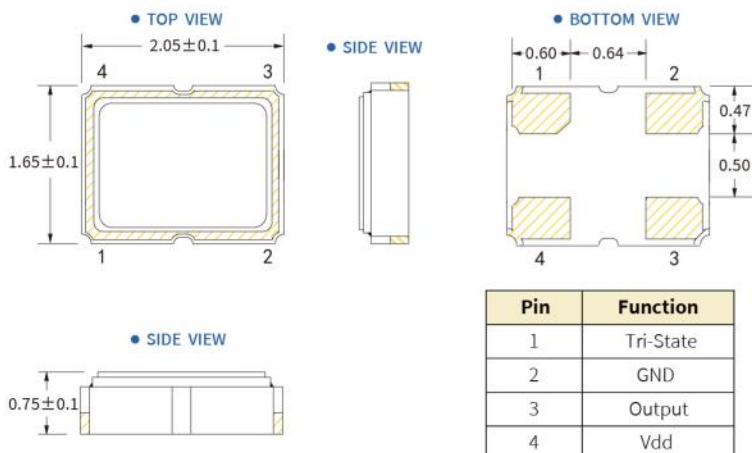

Solder pad layout (UNIT:mm)

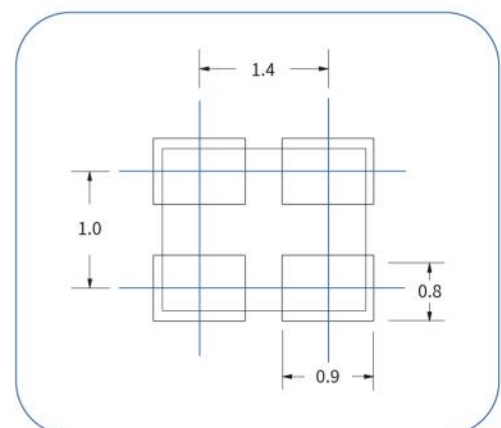

2CQ Series

2.5 x 2.0 mm SMD Crystal Oscillator

Feature

- PLL technology to enable setting any output frequency
- CMOS compatible logic levels
- Tri-state function available
- Supply voltage range : 1.62V ~ 3.63V(Compatible with 1.8V, 2.5V, 3.3V)
- RoHS Compliant / Pb Free

Applications

- Wireless Devices
- Internet of Things (IoT) devices
- Ethernet/Gigabit Ethernet
- Audio, Video, Gaming products
- Micro base station



Electrical Specifications

Item	Symb.	Min.	Typ.	Max.	Unit	Notes
Frequency Range	Freq.	1.000		200.000	MHz	
Operating Temperature	T _{use}	-20		+70	°C	
		-40		+85	°C	
Storage Temperature Range	T _{stg}	-55		+125	°C	
Supply Voltage	V _{dd}	1.62	1.8/2.5/3.3	3.63	V	
Output Load	L _{CMOS}		15		pF	
Current Consumption	I _{cc}			40	mA	
Duty Cycle	SYM	45		55	%	50 % V _{dd} level, L _{CMOS} ≤ 15 pF
Rise / Fall Time	T _R / T _F			5	nS	10% V _{dd} to 90% Level
Start-up Time	T _{str}			10	mS	To 90% of Final Amplitude
High output voltage	V _{OH}	0.9V _{dd}			V	
Low output voltage	V _{OL}			0.1V _{dd}	V	
Enable Voltage High(Logic 1)	V _{IH}	0.7V _{dd}			V	Output will be disable if OE is Logic 0 Output will be enable if OE is Logic 1 or open
Enable Voltage Low(Logic 0)	V _{IL}			0.3V _{dd}	V	
RMS Phase Jitter	T _{RPJ}			1	pSec	Integrated 12KHz to 20MHz
Aging	f _{age}			3	ppm	1st. Year at 25°C


Frequency Stability & Operating Temperature Range

Temp.	FT	±20ppm	±25ppm	±30ppm	±50ppm
-20°C to +70°C	△	★	★	★	★
-40°C to +85°C		△	★	★	★


★: Available △: Conditional

All condition: Include 25°C tolerance, operating temperature range, input voltage change, aging, load change.

Dimensions (UNIT:mm)

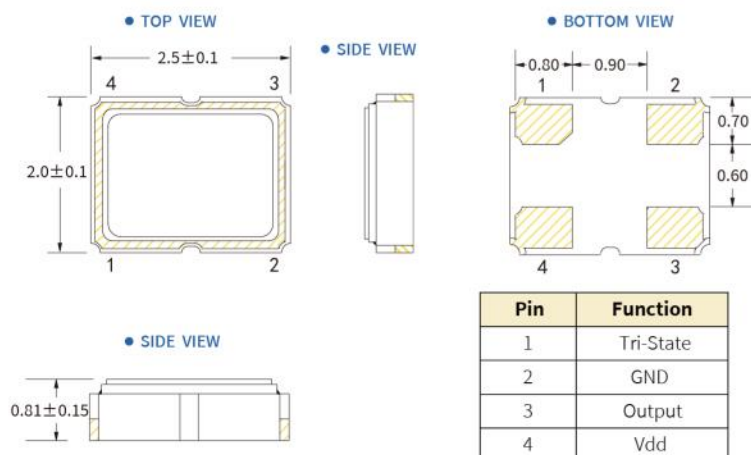

Solder pad layout (UNIT:mm)

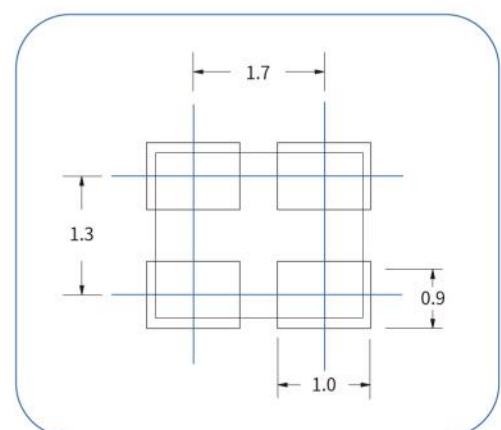

3CQ Series

3.2 x 2.5 mm SMD Crystal Oscillator

Feature

- PLL technology to enable setting any output frequency
- CMOS compatible logic levels
- Tri-state function available
- Supply voltage range : 1.62V ~ 3.63V(Compatible with 1.8V, 2.5V, 3.3V)
- RoHS Compliant / Pb Free

Applications

- Wireless Devices
- Internet of Things (IoT) devices
- Ethernet/Gigabit Ethernet
- Audio, Video, Gaming products
- Micro base station



Electrical Specifications

Item	Symb.	Min.	Typ.	Max.	Unit	Notes
Frequency Range	Freq.	1.000		200.000	MHz	
Operating Temperature	T _{use}	-20		+70	°C	
		-40		+85	°C	
Storage Temperature Range	T _{stg}	-55		+125	°C	
Supply Voltage	V _{dd}	1.62	1.8/2.5/3.3	3.63	V	
Output Load	L _{CMOS}		15		pF	
Current Consumption	I _{cc}			40	mA	
Duty Cycle	SYM	45		55	%	50 % V _{dd} level, L _{CMOS} ≤ 15 pF
Rise / Fall Time	T _R / T _F			5	nS	10% V _{dd} to 90% Level
Start-up Time	T _{str}			10	mS	To 90% of Final Amplitude
High output voltage	V _{OH}	0.9V _{dd}			V	
Low output voltage	V _{OL}			0.1V _{dd}	V	
Enable Voltage High(Logic 1)	V _{IH}	0.7V _{dd}			V	Output will be disable if OE is Logic 0 Output will be enable if OE is Logic 1 or open
Enable Voltage Low(Logic 0)	V _{IL}			0.3V _{dd}	V	
RMS Phase Jitter	T _{RPJ}			1	pSec	Integrated 12KHz to 20MHz
Aging	f _{age}			3	ppm	1st. Year at 25°C


Frequency Stability & Operating Temperature Range

Temp.	FT	±20ppm	±25ppm	±30ppm	±50ppm
-20°C to +70°C	△	★	★	★	★
-40°C to +85°C		△	★	★	★


★: Available △: Conditional

All condition: Include 25°C tolerance, operating temperature range, input voltage change, aging, load change.

Dimensions (UNIT:mm)

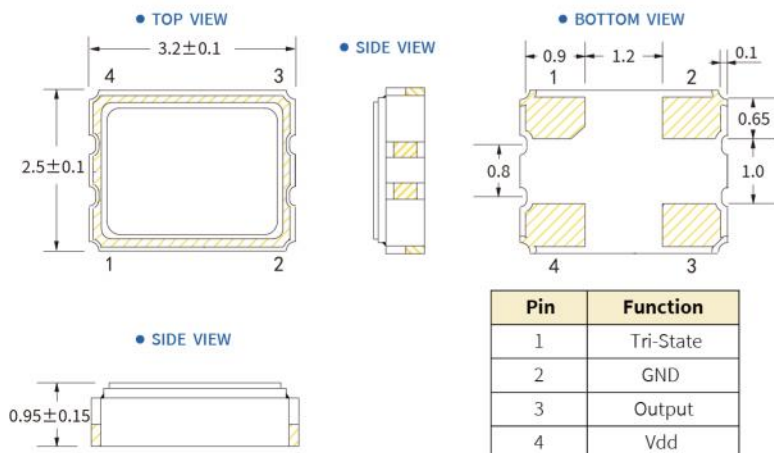

Solder pad layout (UNIT:mm)

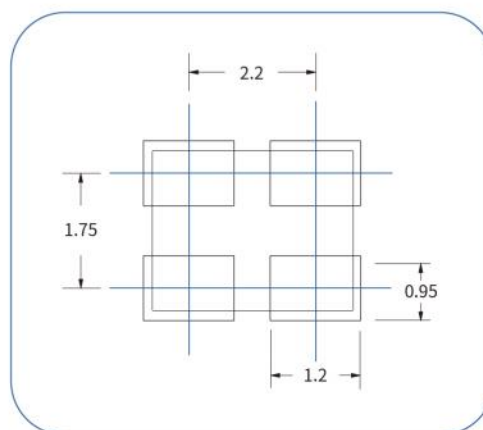

5CQ Series

5.0 x 3.2 mm SMD Crystal Oscillator

Feature

- PLL technology to enable setting any output frequency
- CMOS compatible logic levels
- Tri-state function available
- Supply voltage range : 1.62V ~ 3.63V(Compatible with 1.8V, 2.5V, 3.3V)
- RoHS Compliant / Pb Free

Applications

- Wireless Devices
- Internet of Things (IoT) devices
- Ethernet/Gigabit Ethernet
- Audio, Video, Gaming products
- Micro base station



Electrical Specifications

Item	Symb.	Min.	Typ.	Max.	Unit	Notes
Frequency Range	Freq.	1.000		200.000	MHz	
Operating Temperature	T _{use}	-20		+70	°C	
		-40		+85	°C	
Storage Temperature Range	T _{stg}	-55		+125	°C	
Supply Voltage	V _{dd}	1.62	1.8/2.5/3.3	3.63	V	
Output Load	L _{CMOS}		15		pF	
Current Consumption	I _{cc}			40	mA	
Duty Cycle	SYM	45		55	%	50 % V _{dd} level, L _{CMOS} ≤ 15 pF
Rise / Fall Time	T _R / T _F			5	nS	10% V _{dd} to 90% Level
Start-up Time	T _{str}			10	mS	To 90% of Final Amplitude
High output voltage	V _{OH}	0.9V _{dd}			V	
Low output voltage	V _{OL}			0.1V _{dd}	V	
Enable Voltage High(Logic 1)	V _{IH}	0.7V _{dd}			V	Output will be disable if OE is Logic 0 Output will be enable if OE is Logic 1 or open
Enable Voltage Low(Logic 0)	V _{IL}			0.3V _{dd}	V	
RMS Phase Jitter	T _{RPJ}			1	pSec	Integrated 12KHz to 20MHz
Aging	f _{age}			3	ppm	1st. Year at 25°C


Frequency Stability & Operating Temperature Range

Temp.	FT	±20ppm	±25ppm	±30ppm	±50ppm
-20°C to +70°C	△	★	★	★	★
-40°C to +85°C		△	★	★	★


★: Available △: Conditional

All condition: Include 25°C tolerance, operating temperature range, input voltage change, aging, load change.

Dimensions (UNIT:mm)

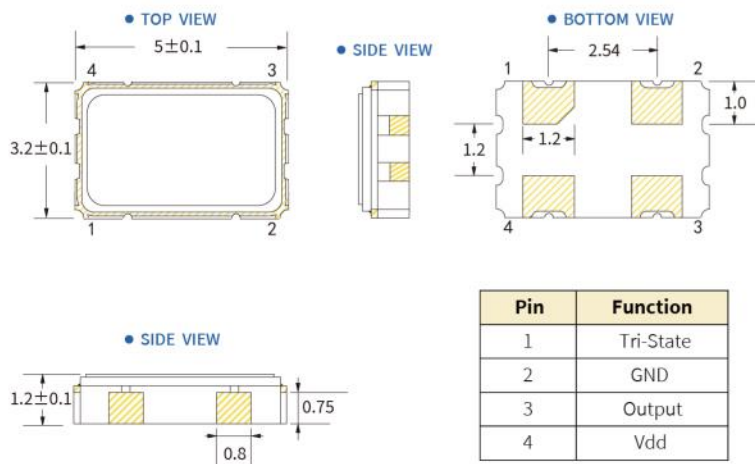

Solder pad layout (UNIT:mm)

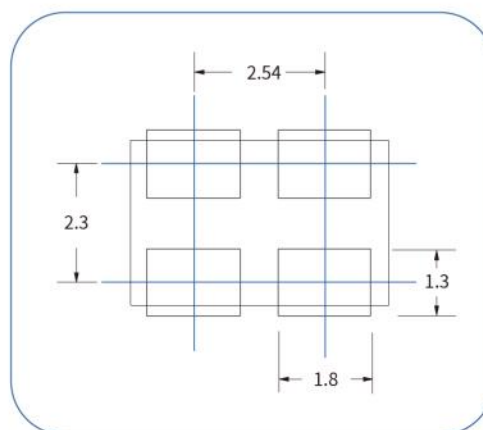

7CQ Series

7.0 x 5.0 mm SMD Crystal Oscillator

Feature

- PLL technology to enable setting any output frequency
- CMOS compatible logic levels
- Tri-state function available
- Supply voltage range : 1.62V ~ 3.63V(Compatible with 1.8V, 2.5V, 3.3V)
- RoHS Compliant / Pb Free

Applications

- Wireless Devices
- Internet of Things (IoT) devices
- Ethernet/Gigabit Ethernet
- Audio, Video, Gaming products
- Micro base station



Electrical Specifications

Item	Symb.	Min.	Typ.	Max.	Unit	Notes
Frequency Range	Freq.	1.000		200.000	MHz	
Operating Temperature	T _{use}	-20		+70	°C	
		-40		+85	°C	
Storage Temperature Range	T _{stg}	-55		+125	°C	
Supply Voltage	V _{dd}	1.62	1.8/2.5/3.3	3.63	V	
Output Load	L _{CMOS}		15		pF	
Current Consumption	I _{cc}			40	mA	
Duty Cycle	SYM	45		55	%	50 % V _{dd} level, L _{CMOS} ≤ 15 pF
Rise / Fall Time	T _R / T _F			5	nS	10% V _{dd} to 90% Level
Start-up Time	T _{str}			10	mS	To 90% of Final Amplitude
High output voltage	V _{OH}	0.9V _{dd}			V	
Low output voltage	V _{OL}			0.1V _{dd}	V	
Enable Voltage High(Logic 1)	V _{IH}	0.7V _{dd}			V	Output will be disable if OE is Logic 0 Output will be enable if OE is Logic 1 or open
Enable Voltage Low(Logic 0)	V _{IL}			0.3V _{dd}	V	
RMS Phase Jitter	T _{RPJ}			1	pSec	Integrated 12KHz to 20MHz
Aging	f _{age}			3	ppm	1st. Year at 25°C


Frequency Stability & Operating Temperature Range

Temp.	FT	±20ppm	±25ppm	±30ppm	±50ppm
-20°C to +70°C	△	★	★	★	★
-40°C to +85°C		△	★	★	★

★: Available △: Conditional

All condition: Include 25°C tolerance, operating temperature range, input voltage change, aging, load change.

Dimensions (UNIT:mm)

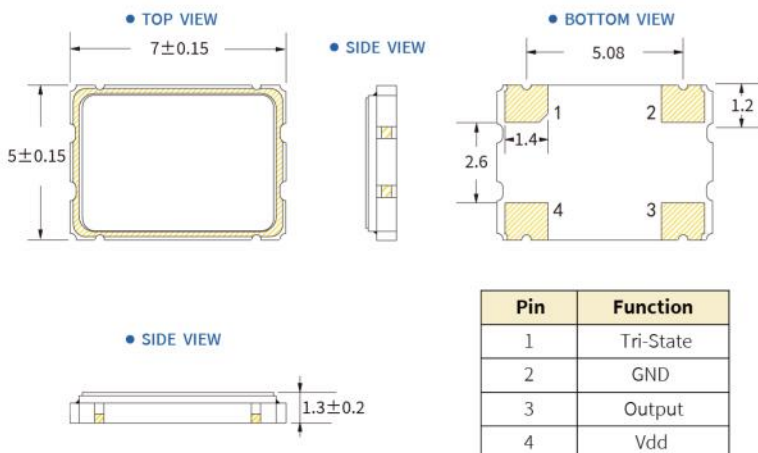

Solder pad layout (UNIT:mm)

